


Cartridge

270 Win - 100 grain

Version 9.0

NOSLER®

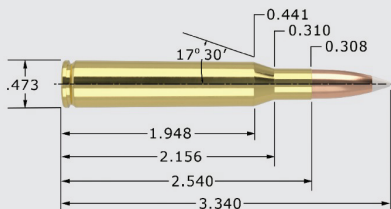

270 Win - 100 grain

270 Cal. (.277")

MAXIMUM SAAMI O.A.C.L.	3.340"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB 100gr. Spitzer	3.275"	0.323	0.186

CASE TYPE:	Nosler	PRIMER TYPE	WLR
CASE HOLDS:	64.7 Gr. WATER	BARREL Length/Make	26" Pac-Nor
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
-------------	------------------	--------------------	-----------------------

RL15	54.0	MAX. 3450		87%
Most Accurate	52.0	* 3324		84%
Powder Tested	50.0	3197		80%
Varget	54.0	MAX. 3485		90%
	52.0	3372		87%
	50.0	* 3260		84%
IMR 4350	60.5	* MAX. 3540		100%
	58.5	3396		97%
	56.5	3251		93%
W760	58.0	MAX. 3554		94%
	56.0	* 3448		91%
	54.0	3343		87%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested


** = Compressed load

Cartridge

270 Win - 110 grain

Version 9.0

NOSLER®

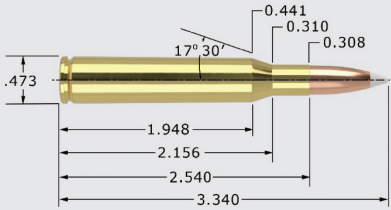

270 Win - 110 grain

270 Cal. (.277")

MAXIMUM SAAMI O.A.C.L.				3.340"	TESTED O.A.C.L.	B.C.	S.D.	
AccuBond®				AB	110gr. Spitzer	3.275"	0.370	0.205
CASE TYPE:	Nosler			PRIMER TYPE			WLR	
CASE HOLDS:	64.6	Gr.	WATER	BARREL Length/Make			24" Shilen	
				BARREL Twist			1-10"	
POWDER TYPE	POWDER CHG. GRS.			MUZZLE VEL. F.P.S.			LOAD DENSITY (VOLUME)	
H4895	48.0	MAX.	3276	<div></div>			82%	
	46.0	*	3177	<div></div>			78%	
	44.0		3078	<div></div>			75%	
N150	50.0	MAX.	3311	<div></div>			91%	
	48.0	*	3212	<div></div>			87%	
	46.0		3114	<div></div>			84%	
H380	53.0	MAX.	3343	<div></div>			86%	
	51.0	*	3259	<div></div>			83%	
	49.0		3175	<div></div>			80%	
Varget	50.5	MAX.	3367	<div></div>			85%	
	48.5	*	3259	<div></div>			81%	
	46.5		3151	<div></div>			78%	
IMR 4320	50.5	MAX.	3370	<div></div>			85%	
	48.5		3260	<div></div>			82%	
	46.5	*	3151	<div></div>			78%	
RL15	51.0	MAX.	3378	<div></div>			82%	
	49.0	*	3267	<div></div>			79%	
	47.0		3157	<div></div>			76%	
IMR 4064	51.0	MAX.	3403	<div></div>			87%	
Most Accurate	49.0	*	3276	<div></div>			84%	
Powder Tested	47.0		3149	<div></div>			80%	
IMR 4350	57.0	* MAX.	3442	<div></div>			94%	
	55.0		3311	<div></div>			91%	
	53.0		3180	<div></div>			88%	
W760	56.0	MAX.	3479	<div></div>			91%	
	54.0		3352	<div></div>			88%	
	52.0	*	3225	<div></div>			84%	
Norma 204	57.0	MAX.	3498	<div></div>			98%	
	55.0	*	3359	<div></div>			95%	
	53.0		3220	<div></div>			91%	

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested


** = Compressed load

Cartridge

270 Win - 130 grain

Version 9.0

NOSLER®

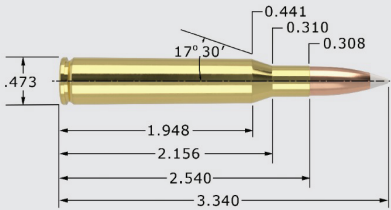

270 Win - 130 grain

270 Cal. (.277")

MAXIMUM SAAMI O.A.C.L.		3.340"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB	130gr. Spitzer	3.320"	0.435	0.242
Ballistic Tip®	BT	130gr. Spitzer	3.320"	0.433	0.242
CT® Ballistic Silvertip®	BST	130gr. Spitzer	3.320"	0.433	0.242
Expansion Tip®	ET	130gr. Spitzer	3.300"	0.459	0.242
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
Partition®	PT	130gr. Spitzer	3.320"	0.416	0.242

CASE TYPE:	Nosler		PRIMER TYPE	Fed 210	
CASE HOLDS:	64.6	Gr. WATER	BARREL Length/Make	24" Shilen	
			BARREL Twist	1-10"	

POWDER TYPE	POWDER CHG. GRS.			MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
IMR 4320	47.0	MAX.	2928		79%
	45.0		2833		76%
	43.0	*	2738		72%
H380	50.0	MAX.	2932		81%
	48.0		2847		78%
	46.0	*	2762		75%
IMR 4895	46.0	* MAX.	2960		77%
	44.0		2870		74%
	42.0		2780		71%
H414	54.5	* MAX.	3062		88%
	52.5		2937		85%
	50.5		2812		81%
IMR 4350	55.0	* MAX.	3078		91%
	53.0		2953		88%
	51.0		2828		84%
Hunter	57.5	MAX.	3089		92%
	55.5		2989		89%
	53.5	*	2888		85%
RL22	58.0	* MAX.	3100		98%
	56.0		2950		94%
	54.0		2800		91%
N160	55.0	MAX.	3102		95%
	53.0		3004		91%
	51.0	*	2907		88%
H4831SC	59.0	MAX.	3118		95%
Most Accurate	57.0		3010		92%
Powder Tested	55.0	*	2903		89%
W760	54.0	* MAX.	3157		88%
	52.0		3051		84%
	50.0		2945		81%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*


* = Most accurate load tested
** = Compressed load

Cartridge

270 Win - 140 grain

Version 9.0

NOSLER®

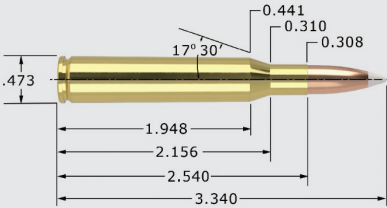

270 Win - 140 grain

270 Cal. (.277")

MAXIMUM SAAMI O.A.C.L.			3.340"	TESTED O.A.C.L.	B.C.	S.D.	
AccuBond®			AB	140gr. Spitzer	3.320"	0.460	0.261
Ballistic Tip®			BT	140gr. Spitzer	3.320"	0.456	0.261
Partition®			PT	140gr. Spitzer	3.320"	0.432	0.261
CASE TYPE:	Nosler		PRIMER TYPE			Fed 210	
CASE HOLDS:	63.7	Gr. WATER	BARREL Length/Make			24" Shilen	
			BARREL Twist			1-10"	
POWDER TYPE	POWDER CHG. GRS.		MUZZLE VEL. F.P.S.			LOAD DENSITY (VOLUME)	
RL15	47.0	* MAX.	2832	<div></div>			77%
	45.0		2727	<div></div>			74%
	43.0		2622	<div></div>			70%
H414	51.5	MAX.	2838	<div></div>			84%
	49.5		2693	<div></div>			81%
	47.5	*	2548	<div></div>			78%
IMR 4350	52.5	MAX.	2858	<div></div>			88%
	50.5		2723	<div></div>			85%
	48.5	*	2588	<div></div>			81%
IMR 4831	53.5	MAX.	2910	<div></div>			90%
Most Accurate Powder Tested	51.5		2790	<div></div>			86%
	49.5	*	2670	<div></div>			83%
Hunter	56.5	MAX.	2975	<div></div>			91%
	54.5		2880	<div></div>			88%
	52.5	*	2786	<div></div>			85%
IMR 7828	57.5	MAX.	2977	<div></div>			96%
	55.5		2870	<div></div>			93%
	53.5	*	2763	<div></div>			89%
H4831SC	58.0	* MAX.	2999	<div></div>			95%
	56.0		2886	<div></div>			92%
	54.0		2773	<div></div>			88%
RL19	55.0	MAX.	3003	<div></div>			94%
	53.0		2891	<div></div>			90%
	51.0	*	2779	<div></div>			87%
W760	53.0	* MAX.	3020	<div></div>			87%
	51.0		2928	<div></div>			84%
	49.0		2837	<div></div>			81%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data."

* = Most accurate load tested


** = Compressed load

Cartridge

270 Win - 150 grain

Version 9.0

NOSLER®

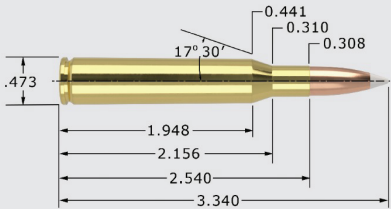

270 Win - 150 grain

270 Cal. (.277")

MAXIMUM SAAMI O.A.C.L.		3.340"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB	150gr. Spitzer	3.320"	0.500	0.279
AccuBond® Long Range	ABLR	150gr. Spitzer	3.340"	0.591	0.279
Ballistic Tip®	BT	150gr. Spitzer	3.320"	0.496	0.279
CT® Ballistic Silvertip®	BST	150gr. Spitzer	3.320"	0.496	0.279
Partition®	PT	150gr. Spitzer	3.320"	0.465	0.279


CASE TYPE:	Nosler	PRIMER TYPE	Fed 210
CASE HOLDS:	62.8 Gr. WATER	BARREL Length/Make	24" Shilen
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
H4350	52.0 * MAX. 2782		88%
Most Accurate	50.0 2657		84%
Powder Tested	48.0 2532		81%
W760	50.0 MAX. 2810		83%
	48.0 2740		80%
	46.0 * 2670		77%
IMR 4320	45.0 * MAX. 2818		78%
	43.0 2723		74%
	41.0 2628		71%
N165	54.0 MAX. 2842		96%
	52.0 2752		92%
	50.0 * 2662		88%
IMR 7828	57.5 MAX. 2862		97%
	55.5 2737		94%
	53.5 * 2612		91%
IMR 4350	53.0 * MAX. 2867		90%
	51.0 2762		87%
	49.0 2657		83%
RL19	55.0 MAX. 2892		95%
	53.0 2777		92%
	51.0 * 2662		88%
RL22	56.5 MAX. 2902		98%
	54.5 2787		94%
	52.5 * 2672		91%
H4831	55.0 MAX. 2905		91%
	53.0 2817		88%
	51.0 * 2728		85%
MAGPRO	61.5 MAX. 2918		** 101%
	59.5 * 2829		98%
	57.5 2740		94%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested
** = Compressed load

NOSLER®

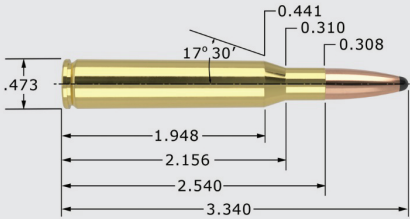

270 Win - 160 grain

270 Cal. (.277")

MAXIMUM SAAMI O.A.C.L.			3.340"	TESTED O.A.C.L.	B.C.	S.D.
Partition®			PT	160gr. Semi-Spitzer	3.320"	0.434 0.298
CASE TYPE:		Nosler		PRIMER TYPE		Fed 210
CASE HOLDS:		63.8 Gr. WATER		BARREL Length/Make		24" Shlien
				BARREL Twist		1-10"
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.		LOAD DENSITY (VOLUME)		
H4350	51.5 * MAX.	2672		85%		
	49.5	2557		82%		
	47.5	2442		79%		
IMR 7828	57.0 * MAX.	2732		95%		
	55.0	2637		92%		
	53.0	2542		88%		
RL19	53.5 * MAX.	2750		91%		
Most Accurate	51.5	2620		88%		
Powder Tested	49.5	2490		84%		
IMR 4350	51.0 MAX.	2758		85%		
	49.0	2643		82%		
	47.0 *	2528		79%		
N165	52.0 MAX.	2761		91%		
	50.0	2687		87%		
	48.0 *	2613		84%		
H4831SC	54.5 * MAX.	2775		89%		
	52.5	2683		86%		
	50.5	2591		82%		
MAGPRO	60.0 MAX.	2789		97%		
	58.0	2681		94%		
	56.0 *	2573		90%		
IMR 4831	52.0 * MAX.	2820		87%		
	50.0	2722		84%		
	48.0	2624		80%		
RL22	56.0 * MAX.	2828		95%		
	54.0	2703		92%		
	52.0	2578		89%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data."

* = Most accurate load tested
** = Compressed load