


Cartridge

40 S&W - 135 grain

Version 9.0

NOSLER®

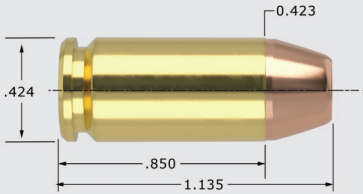

40 S&W - 135 grain

10mm (.400")

MAXIMUM SAAMI O.A.C.L.			1.135"	TESTED O.A.C.L.	B.C.	S.D.
Sporting Handgun®			SHG 135gr. JHP	1.125"	0.093	0.121
CASE TYPE:	Winchester		PRIMER TYPE			WSP
CASE HOLDS:	12.7	Gr. WATER	BARREL Length/Make			4.0" S&W
			BARREL Twist			1-16"
POWDER TYPE	POWDER CHG. GRS.		MUZZLE VEL. F.P.S.		LOAD DENSITY (VOLUME)	
WST	6.8	* MAX.	1108		**	102%
	6.3		1027			94%
	5.8		945			87%
AA #5	9.0	* MAX.	1117			75%
	8.5		1091			70%
	8.0		1065			66%
Unique	7.2	* MAX.	1125			96%
	6.7		1042			89%
	6.2		958			83%
Bullseye	6.4	* MAX.	1160			80%
	5.9		1071			74%
	5.4		981			67%
Green Dot	5.8	MAX.	1166			88%
	5.3		1047			80%
	4.8	*	929			73%
AA #7	11.9	MAX.	1224			95%
	11.4		1190			91%
	10.9	*	1156			87%
AA #2	6.6	* MAX.	1232			80%
	6.1		1197			74%
	5.6		1162			68%
WSF	7.8	* MAX.	1242			82%
	7.3		1157			77%
	6.8		1072			71%
Blue Dot	11.3	* MAX.	1243		**	111%
Most Accurate	10.8		1188		**	106%
Powder Tested	10.3		1133		**	101%
CFE Pistol	8.8	MAX.	1382			82%
	8.3	*	1333			77%
	7.8		1283			72%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data."

* = Most accurate load tested


** = Compressed load

Cartridge

40 S&W - 150 grain

Version 9.0

NOSLER®

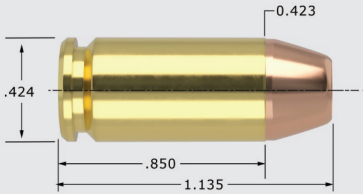

40 S&W - 150 grain

10mm (.400")

MAXIMUM SAAMI O.A.C.L.			1.135"	TESTED O.A.C.L.	B.C.	S.D.
Sporting Handgun®			SHG	150gr. JHP	1.125"	0.106 0.134
CASE TYPE:	Winchester		PRIMER TYPE			WSP
CASE HOLDS:	11.3	Gr. WATER	BARREL Length/Make			4.0" S&W
			BARREL Twist			1-16"
POWDER TYPE	POWDER CHG. GRS.		MUZZLE VEL. F.P.S.		LOAD DENSITY (VOLUME)	
AA #7	10.5	MAX.	1083		94%	
	10.0		1019		90%	
	9.5	*	955		85%	
AA #2	6.4	MAX.	1118		87%	
	5.9		1070		80%	
	5.4	*	1022		74%	
AA #5	8.7	* MAX.	1123		81%	
Most Accurate	8.2		1051		76%	
Powder Tested	7.7		978		72%	
HS-6	9.2	* MAX.	1137		89%	
	8.7		1075		84%	
	8.2		1013		79%	
Hi-Skor 800-X	8.3	MAX.	1164		**	116%
	7.8	*	1095		**	109%
	7.3		1027		**	102%
Power Pistol	8.0	MAX.	1170		94%	
	7.5		1102		88%	
	7.0	*	1035		83%	
WSF	6.9	MAX.	1209		81%	
	6.4	*	1089		76%	
	5.9		969		70%	
AutoComp	7.3	* MAX.	1220		76%	
	6.8		1138		71%	
	6.3		1056		66%	
CFE Pistol	7.6	MAX.	1236		79%	
	7.1		1157		74%	
	6.6	*	1078		69%	
Longshot	9.0	MAX.	1297		100%	
	8.5	*	1260		94%	
	8.0		1222		88%	

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data."

* = Most accurate load tested


** = Compressed load

Cartridge

40 S&W - 180 grain

Version 9.0

NOSLER®

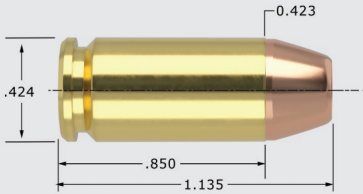

40 S&W - 180 grain

10mm (.400")

MAXIMUM SAAMI O.A.C.L.				1.135"	TESTED O.A.C.L.	B.C.	S.D.
Sporting Handgun®			SHG	180gr. JHP	1.125"	0.147	0.161
CASE TYPE:	Winchester			PRIMER TYPE		WSP	
CASE HOLDS:	9.9	Gr. WATER		BARREL Length/Make		4.0" S&W	
				BARREL Twist		1-16"	
POWDER TYPE	POWDER CHG. GRS.			MUZZLE VEL. F.P.S.		LOAD DENSITY (VOLUME)	
WST	4.8	* MAX.	860			92%	
	4.3		768			83%	
	3.8		675			73%	
Bullseye	4.8	* MAX.	901			77%	
	4.3		797			69%	
	3.8		694			61%	
Green Dot	4.9	* MAX.	922			95%	
	4.4		825			85%	
	3.9		727			76%	
AA #7	8.8	* MAX.	944			90%	
	8.3		914			85%	
	7.8		884			80%	
AA #2	5.3	MAX.	955			82%	
	4.8		898			75%	
	4.3	*	842			67%	
AA #5	7.2	* MAX.	971			77%	
	6.7		936			71%	
	6.2		901			66%	
Titegroup	4.7	MAX.	978			63%	
	4.2	*	877			57%	
	3.7		776			50%	
WSF	5.9	* MAX.	981			79%	
Most Accurate	5.4		897			73%	
Powder Tested	4.9		813			66%	
Silhouette	6.2	MAX.	1020			78%	
	5.7	*	949			72%	
	5.2		877			66%	
CFE Pistol	5.9	MAX.	1034			70%	
	5.4	*	949			64%	
	4.9		864			58%	

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data."


* = Most accurate load tested
** = Compressed load

Cartridge

40 S&W - 200 grain

Version 9.0

NOSLER®

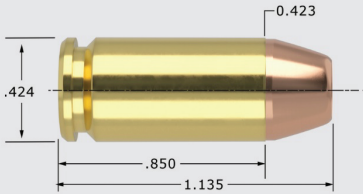

40 S&W - 200 grain

10mm (.400")

MAXIMUM SAAMI O.A.C.L.			1.135"	TESTED O.A.C.L.	B.C.	S.D.
Sporting Handgun®			SHG	200gr. JHP	1.125"	0.163 0.179
CASE TYPE:	Winchester		PRIMER TYPE			WSP
CASE HOLDS:	9.3	Gr. WATER	BARREL Length/Make			4.0" S&W
			BARREL Twist			1-16"
POWDER TYPE	POWDER CHG. GRS.		MUZZLE VEL. F.P.S.		LOAD DENSITY (VOLUME)	
AA #7	7.3	MAX.	846		80%	
	6.8	*	774		74%	
	6.3		703		69%	
True Blue	5.9	MAX.	876		65%	
	5.4	*	802		60%	
	4.9		728		54%	
CFE Pistol	4.8	* MAX.	897		61%	
	4.3		817		54%	
	3.8		737		48%	
AutoComp	5.2	MAX.	898		66%	
	4.7	*	829		59%	
	4.2		760		53%	
Silhouette	5.5	MAX.	905		74%	
	5.0	*	830		67%	
	4.5		755		60%	
HS-6	6.3	MAX.	908		74%	
	5.8		853		68%	
	5.3	*	798		62%	
Power Pistol	5.8	* MAX.	933		83%	
Most Accurate	5.3		850		76%	
Powder Tested	4.8		767		69%	
Longshot	5.9	* MAX.	942		79%	
	5.4		883		73%	
	4.9		824		66%	
Hi-Skor 800-X	6.2	MAX.	961		**	105%
	5.7	*	913			97%
	5.2		865			88%
IMR BLUE	8.0	MAX.	987		**	111%
	7.5		932		**	104%
	7.0	*	876			97%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data."

* = Most accurate load tested

** = Compressed load