


Cartridge

45 Auto - 185 grain

Version 9.0

NOSLER®

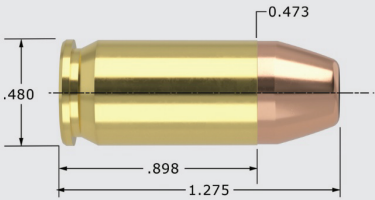

45 Auto - 185 grain

45 Cal. (.451")

MAXIMUM SAAMI O.A.C.L.			1.275"	TESTED O.A.C.L.	B.C.	S.D.
Sporting Handgun®			SHG 185gr. JHP	1.200"	0.142	0.130
CASE TYPE:	Winchester		PRIMER TYPE	Fed. 150		
CASE HOLDS:	19.2	Gr. WATER	BARREL Length/Make	5" Douglas		
			BARREL Twist	1-16"		
POWDER TYPE	POWDER CHG. GRS.		MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
Bullseye	5.4	MAX.	840	45%		
	4.9		780	41%		
	4.4	*	720	36%		
AA #2	6.3	MAX.	888	50%		
	5.8		833	46%		
	5.3	*	778	42%		
Green Dot	6.4	* MAX.	908	64%		
	5.9		843	59%		
	5.4		778	54%		
AA #5	9.6	MAX.	924	53%		
Most Accurate	9.1		864	50%		
Powder Tested	8.6	*	804	47%		
N320	6.2	* MAX.	938	65%		
	5.7		813	59%		
	5.2		688	54%		
Competition	5.1	MAX.	954	52%		
	4.6	*	886	47%		
	4.1		818	42%		
AutoComp	7.4	* MAX.	958	45%		
	6.9		885	42%		
	6.4		812	39%		
Power Pistol	8.5	MAX.	963	59%		
	8.0		921	56%		
	7.5	*	879	52%		
Titegroup	5.7	MAX.	980	40%		
	5.2	*	916	36%		
	4.7		852	33%		
CFE Pistol	7.9	MAX.	1113	48%		
	7.4		1047	45%		
	6.9	*	982	42%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*


* = Most accurate load tested
** = Compressed load

Cartridge

45 Auto - 230 grain

Version 9.0

NOSLER®

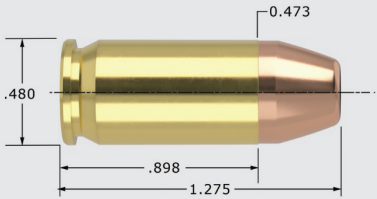

45 Auto - 230 grain

45 Cal. (.451")

MAXIMUM SAAMI O.A.C.L.				1.275"	TESTED O.A.C.L.	B.C.	S.D.
Sporting Handgun®				SHG 230gr. JHP	1.200"	0.183	0.162
Sporting Handgun®				SHG 230gr. FMJ	1.200"	0.175	0.162
CASE TYPE:	Winchester			PRIMER TYPE			Fed. 150
CASE HOLDS:	17.7	Gr. WATER		BARREL Length/Make			5" Douglas
				BARREL Twist			1-16"
POWDER TYPE	POWDER CHG. GRS.			MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
WST	4.8	* MAX.	769				52%
	4.3		723				46%
	3.8		678				41%
Bullseye	5.1	* MAX.	790				46%
	4.6		730				41%
	4.1		670				37%
Hi-Skor 700-X	5.0	MAX.	800				56%
	4.5		735				51%
	4.0	*	670				45%
Titegroup	4.7	MAX.	802				35%
	4.2	*	709				32%
	3.7		616				28%
Unique	6.5	MAX.	808				62%
Most Accurate Powder Tested	6.0		753				57%
	5.5	*	698				53%
HS-6	8.1	MAX.	810				50%
	7.6	*	774				47%
	7.1		738				44%
AA #5	8.5	* MAX.	840				51%
	8.0		790				48%
	7.5		740				45%
AutoComp	6.5	MAX.	857				43%
	6.0	*	789				40%
	5.5		721				37%
Longshot	6.9	MAX.	898				49%
	6.4		835				45%
	5.9	*	773				42%
Silhouette	7.3	MAX.	916				52%
	6.8		856				48%
	6.3	*	797				44%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested
** = Compressed load