


# Cartridge

## 38 Special +P - 158 grain

Version 9.0

**NOSLER®**

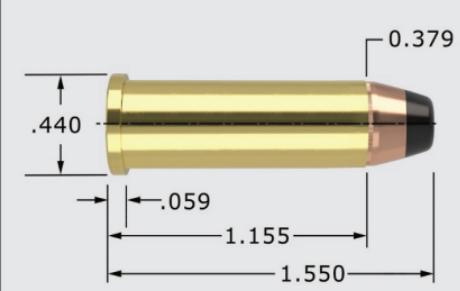

## 38 Special +P - 158 grain

## 38 Cal. (.357")

MAXIMUM SAAMI O.A.C.L.		1.550"	TESTED O.A.C.L.	B.C.	S.D.		
Sporting Handgun™ Revolver	SHG	158gr. JHP	1.440"	0.182	0.177		
CASE TYPE:	Federal		PRIMER TYPE	WSP			
CASE HOLDS:	15.6	Gr. WATER	BARREL Length/Make	7.71" H-S Prec.			
			BARREL Twist	1-18.75"			
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)				
<b>Unique</b>	5.1 * MAX.	736					
	4.6	621					
	4.1	505					
<b>AA #2</b>	4.3 * MAX.	821					
	3.8	708					
	3.3	594					
<b>Universal</b>	4.8 MAX.	863					
	4.3 *	749					
	3.8	635					
<b>Power Pistol</b>	5.8 * MAX.	879					
	5.3	802					
	4.8	724					
<b>Hi-Skor 700-X</b>	4.2 * MAX.	910					
	3.7	799					
	3.2	688					
<b>HS-6</b>	6.5 MAX.	910					
	6.0 *	828					
	5.5	745					
<b>AA #5</b> Most Accurate Powder Tested	6.4 MAX.	966					
	5.9 *	874					
	5.4	781					
<b>IMR BLUE</b>	7.7 MAX.	980					
	7.2	913					
	6.7 *	846					
<b>CFE Pistol</b>	5.4 MAX.	990					
	4.9 *	884					
	4.4	778					
<b>Silhouette</b>	5.6 MAX.	999					
	5.1 *	899					
	4.6	798					

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data."

\* = Most accurate load tested


\*\* = Compressed load

# Cartridge

## 38 Special - 158 grain

Version 9.0

**NOSLER®**

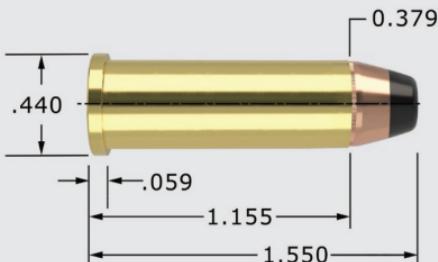

## 38 Special - 158 grain

38 Cal. (.357")

MAXIMUM SAAMI O.A.C.L.		1.550"	TESTED O.A.C.L.	B.C.	S.D.		
Sporting Handgun®	SHG	158gr. JHP	1.440"	0.182	0.177		
CASE TYPE:	Federal		PRIMER TYPE	WSP			
CASE HOLDS:	15.6 Gr. WATER		BARREL Length/Make	7.75" H-S Prec.			
			BARREL Twist	1-16"			
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)				
WST	3.6 * MAX.	692	44%				
	3.1	577	38%				
	2.6	462	32%				
Power Pistol	5.1 * MAX.	699	44%				
	4.6	623	39%				
	4.1	547	35%				
Unique	4.8 * MAX.	746	52%				
	4.3	663	47%				
	3.8	581	41%				
AA #2	4.0 MAX.	760	39%				
	3.5	680	35%				
	3.0 *	600	30%				
Universal	4.4 MAX.	782	45%				
	3.9 *	657	40%				
	3.4	532	35%				
HS-6 Most Accurate Powder Tested	6.5 MAX.	809	46%				
	6.0	726	42%				
	5.5 *	643	39%				
Bullseye	4.1 * MAX.	830	42%				
	3.6	730	37%				
	3.1	630	32%				
AA #5	6.2 * MAX.	840	42%				
	5.7	750	38%				
	5.2	660	35%				
True Blue	5.1 MAX.	879	34%				
	4.6 *	797	30%				
	4.1	715	27%				
CFE Pistol	5.0 MAX.	914	38%				
	4.5 *	792	34%				
	4.0	669	30%				

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data."

\* = Most accurate load tested

\*\* = Compressed load